
SUPPLY SCOPE (distributor quantities, no material prices): Nudura ICF walls above the basement, pre-cut by BuildEase - LG 457 core (unassembled XR35 panels on insert webs + 4-way connectors, corners lapped straights, openings timber-bucked by others) and 8in Std internal walls on the transfer deck, GF / FF external walls in 6in XR35. The raft, existing basement, decks, slabs, steels, roof, windows, doors and partitions are shown in good faith only (design assumptions) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

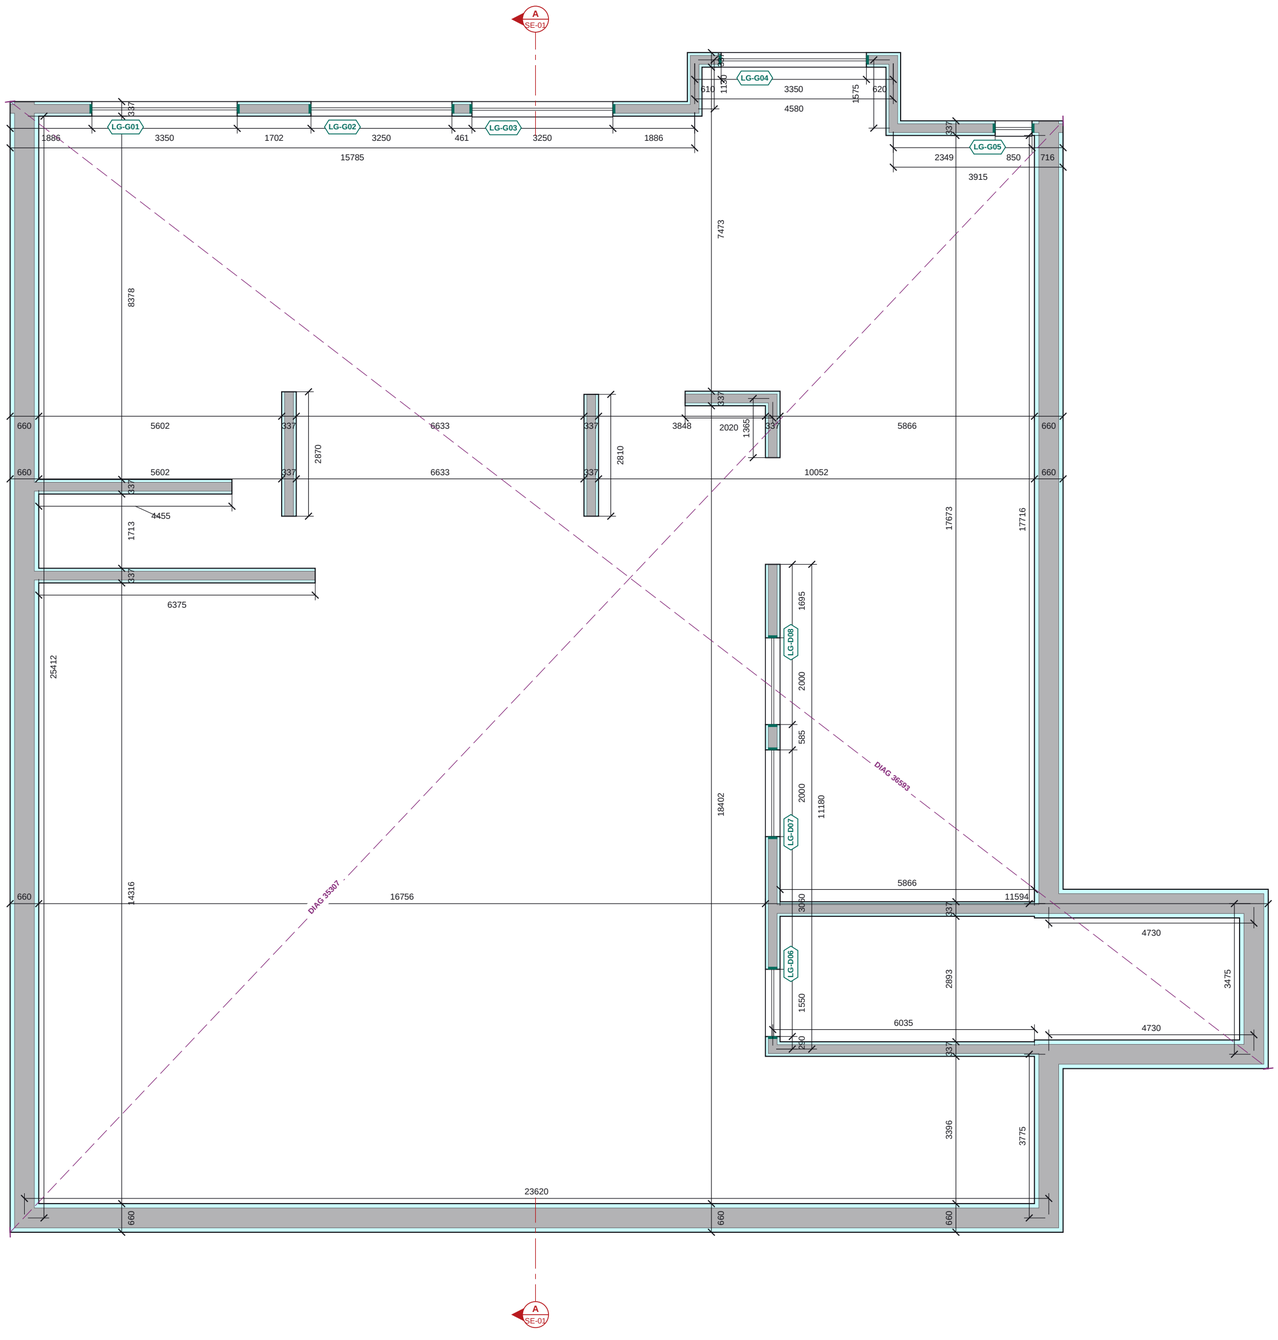

EPS insulation (Nudura form)
Concrete core
End cap at opening
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

LOWER GROUND ICF PLAN

Scale 1:100 @ A2 | Plan cut at +4385

0 1 2 3 4 5m

LOWER GROUND ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
LG-D06	1550	2100	+2905	+5005	-
LG-D07	2000	2100	+2905	+5005	-
LG-D08	2000	2100	+2905	+5005	-
LG-G01	3350	2743	+2905	+5648	-
LG-G02	3250	2743	+2905	+5648	-
LG-G03	3250	2743	+2905	+5648	-
LG-G04	3350	2743	+2905	+5648	-
LG-G05	850	2743	+2905	+5648	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 9.18in XR35 Panel Series, 101.6 EPS + 457.2 core + 101.6 EPS = 660.4; 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. BDI S1 02 shows 450 RC walls to the LG perimeter: modelled as a 457 core of unassembled Nudura XR35 panels on 12in + 6in insert webs (BDI to accept). GF / FF external walls converted to 6in XR35. Reinforcement, lintels, the FF deck ledger / bearing into the ICF and the indicative steels for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from BDI 20164022 rev C4, which takes precedence.
5. Masonry walls shown for context.
6. Datum: 0 = raft SSL-2 (+40.357). Transfer deck SSL-1 +43.262, Top of ICF +46.587, GF SSL0 +46.987, FF SSL1 +50.297, U/S wall plate +52.962.
7. From BDI 20164022 S1 02 / S3 02 (C4), the architect's GF / FF plans and Ethos' extension sketch.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Developments (Nudura distributor) - Mark Whalley	House - walls above the basement, Badgers Hollow, Alderley Edge

DRAWING TITLE
LOWER GROUND ICF GENERAL ARRANGEMENT
ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:100	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-088-GA-01	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.