
SUPPLY SCOPE (distributor quantities, no material prices): Nudura ICF walls above the basement, pre-cut by BuildEase - LG 457 core (unassembled XR35 panels on insert webs + 4-way connectors, corners lapped straights, openings timber-bucked by others) and 8in Std internal walls on the transfer deck, GF / FF external walls in 6in XR35. The raft, existing basement, decks, slabs, steels, roof, windows, doors and partitions are shown in good faith only (design assumptions) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

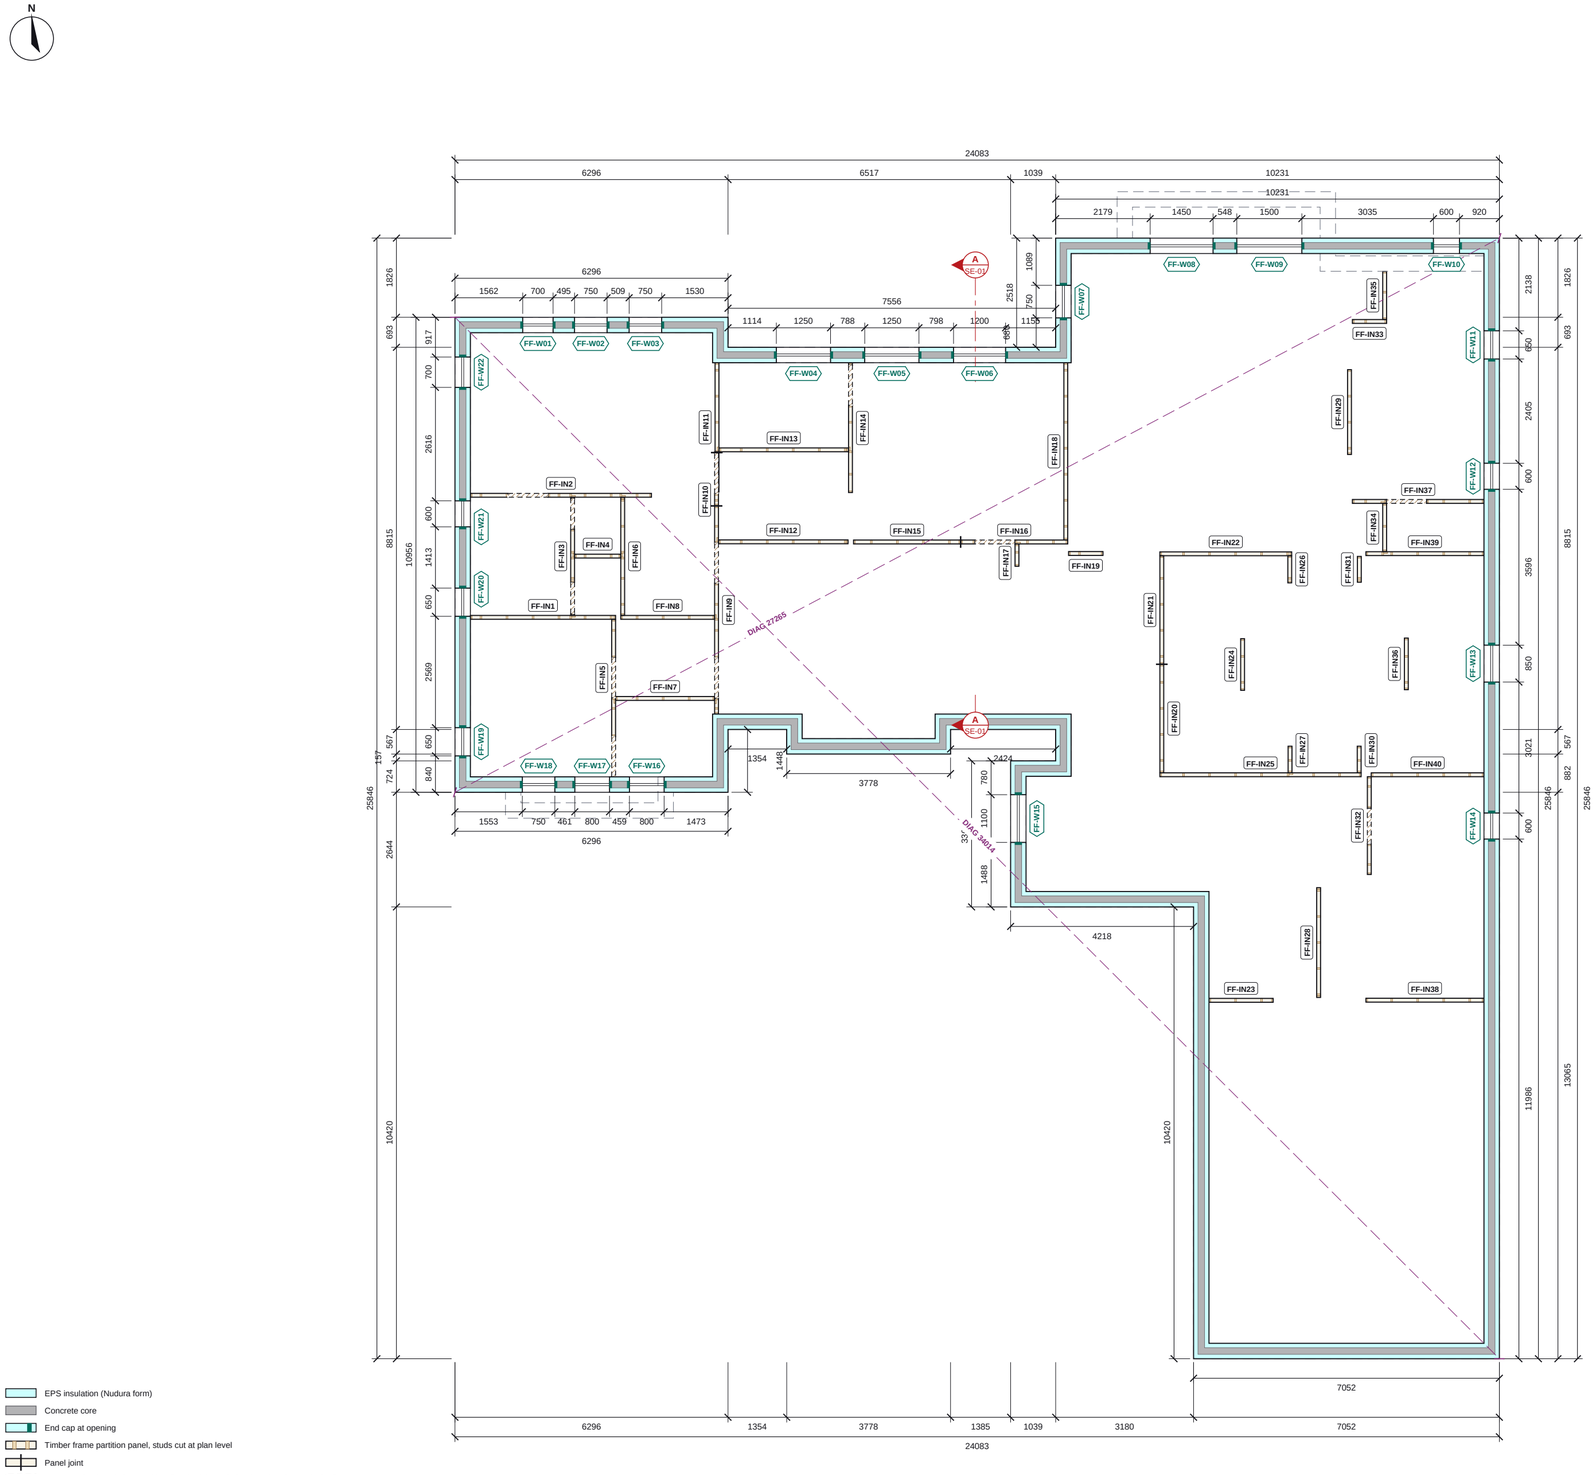

EPS insulation (Nudura form)
Concrete core
End cap at opening
Timber frame partition panel, studs cut at plan level
Panel joint
Door opening in a timber partition (hatched through the door, head over dashed)
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

FIRST FLOOR ICF PLAN

Scale 1:100 @ A2 | Plan cut at +11255

0 1 2 3 4 5m

FIRST FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
FF-W01	700	1700	+10530	+12230	-
FF-W02	750	1700	+10530	+12230	-
FF-W03	750	1700	+10530	+12230	-
FF-W04	1250	1700	+10530	+12230	-
FF-W05	1250	1700	+10530	+12230	-
FF-W06	1200	1700	+10530	+12230	-
FF-W07	750	1700	+10530	+12230	-
FF-W08	1450	1700	+10530	+12230	-
FF-W09	1500	1700	+10530	+12230	-
FF-W10	600	1700	+10530	+12230	-
FF-W11	650	1700	+10530	+12230	-
FF-W12	600	1700	+10530	+12230	-
FF-W13	850	1700	+10530	+12230	-
FF-W14	600	1700	+10530	+12230	-
FF-W15	1100	1700	+10530	+12230	-
FF-W16	800	1700	+10530	+12230	-
FF-W17	800	1700	+10530	+12230	-
FF-W18	750	1700	+10530	+12230	-
FF-W19	650	1700	+10530	+12230	-
FF-W20	650	1700	+10530	+12230	-
FF-W21	600	1700	+10530	+12230	-
FF-W22	700	1700	+10530	+12230	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. BDI S1 02 shows 450 RC walls to the LG perimeter: modelled as a 457 core of unassembled Nudura XR35 panels on 12in + 6in insert webs (BDI to accept). GF / FF external walls converted to 6in XR35. Reinforcement, lintels, the FF deck ledger / bearing into the ICF and the indicative steels for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from BDI 20164022 rev C4, which takes precedence.
5. Masonry walls shown for context.
6. Datum: 0 = raft SSL-2 (+40.357). Transfer deck SSL-1 +43.262, Top of ICF +46.587, GF SSL0 +46.987, FF SSL1 +50.297, U/S wall plate +52.962.
7. From BDI 20164022 S1 02 / S3 02 (C4), the architect's GF / FF plans and Ethos' extension sketch.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Developments (Nudura distributor) - Mark Whalley	House - walls above the basement, Badgers Hollow, Alderley Edge

DRAWING TITLE
FIRST FLOOR ICF GENERAL ARRANGEMENT
ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:100	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-088-GA-03	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.